

POLOS Y CEROS DE STS-2 N/S 29424

PoleZero.mcd, 23.12.2008 12:02

1

Pole-Zero Representation of the STS-2 Transfer Function from 0.001 to 100 Hz

G. Streckeisen AG
Daetlikonerstr. 5
CH-8422 Pfungen
Switzerland
Tel. +41 52 315 21 61
Fax +41 52 315 27 10

- Conditions:**
1. Poles and zeroes below are deduced from the theoretical response to ground velocity [$\frac{V_s}{m}$].
 2. The transfer function has been verified by response measurements using the calibration coil for excitation.
 3. The output signal is the voltage at one of the normal STS-2 differential outputs (X, Y, or Z). The output filter ('mixer pole') is a 1st order lowpass filter which is not integrated in the feedback loop.
 4. The term 'generation' applies only to the electronics. As will be seen on the last two plots, significant deviations of the transfer function among the generations occur only at frequencies above 10 Hz.
 5. No exact limits exist for the transition from one STS-2 generation to the next, neither for calendar date nor serial number. Some instruments that were shipped back for repair now are equipped with p.c. boards of a newer generation. Please consult the appropriate manual that was included in the shipment, or the "List of STS-2 generations", which is available at G. Streckeisen AG.

$n := 0 \dots 430$ Logarithmic scale for frequency: $f_n := \frac{1}{1000^n} \cdot 10^{0.6n}$ $\omega_n := 2 \cdot \pi \cdot f_n$

1st generation STS-2

0

Zeros:

$$Z_0 := Zre_0 + i \cdot Zim_0$$

$$Z_0 = -318.6 + 401.2i$$

$$Z_1 := Zre_0 - i \cdot Zim_0$$

$$Z_1 = -318.6 - 401.2i$$

$$Z_2 := Zre_1$$

$$Z_2 = -15.15$$

Poles:

$$P_0 := Pre_0 + i \cdot Pim_0$$

$$P_0 = -7.454 \times 10^3 - 7.142i \times 10^3$$

$$P_3 := Pre_2 + i \cdot Pim_2$$

$$P_3 = -100.9 + 401.5i$$

$$P_1 := Pre_0 - i \cdot Pim_0$$

$$P_1 = -7.454 \times 10^3 + 7.142i \times 10^3$$

$$P_4 := Pre_2 - i \cdot Pim_2$$

$$P_4 = -100.9 - 401.5i$$

$$P_2 := Pre_1$$

$$P_2 = -417.1$$

$$P_5 := Pre_3$$

$$P_5 = -15.99$$

'Mixer pole':

$$P_6 := Pre_4 + i \cdot Pim_4$$

$$P_6 = -0.037 - 0.037i$$

$$\omega_{max} := -2 \cdot \pi \cdot 29.8$$

$$P_7 := Pre_4 - i \cdot Pim_4$$


$$P_7 = -0.037 + 0.037i$$

$$G_{1_n} := (i \cdot \omega_n)^2 \frac{8.6877 \cdot 10^{15} \left[\prod_{k=0}^2 (i \cdot \omega_n - Z_k) \right]}{\prod_{l=0}^7 (i \cdot \omega_n - P_l) (i \cdot \omega_n - \omega_{max})}$$

$$\Phi_{1_n} := \frac{180}{\pi} \cdot \arg(G_{1_n})$$

STS-2 N/S 29424

1st generation STS-2: Amplitude

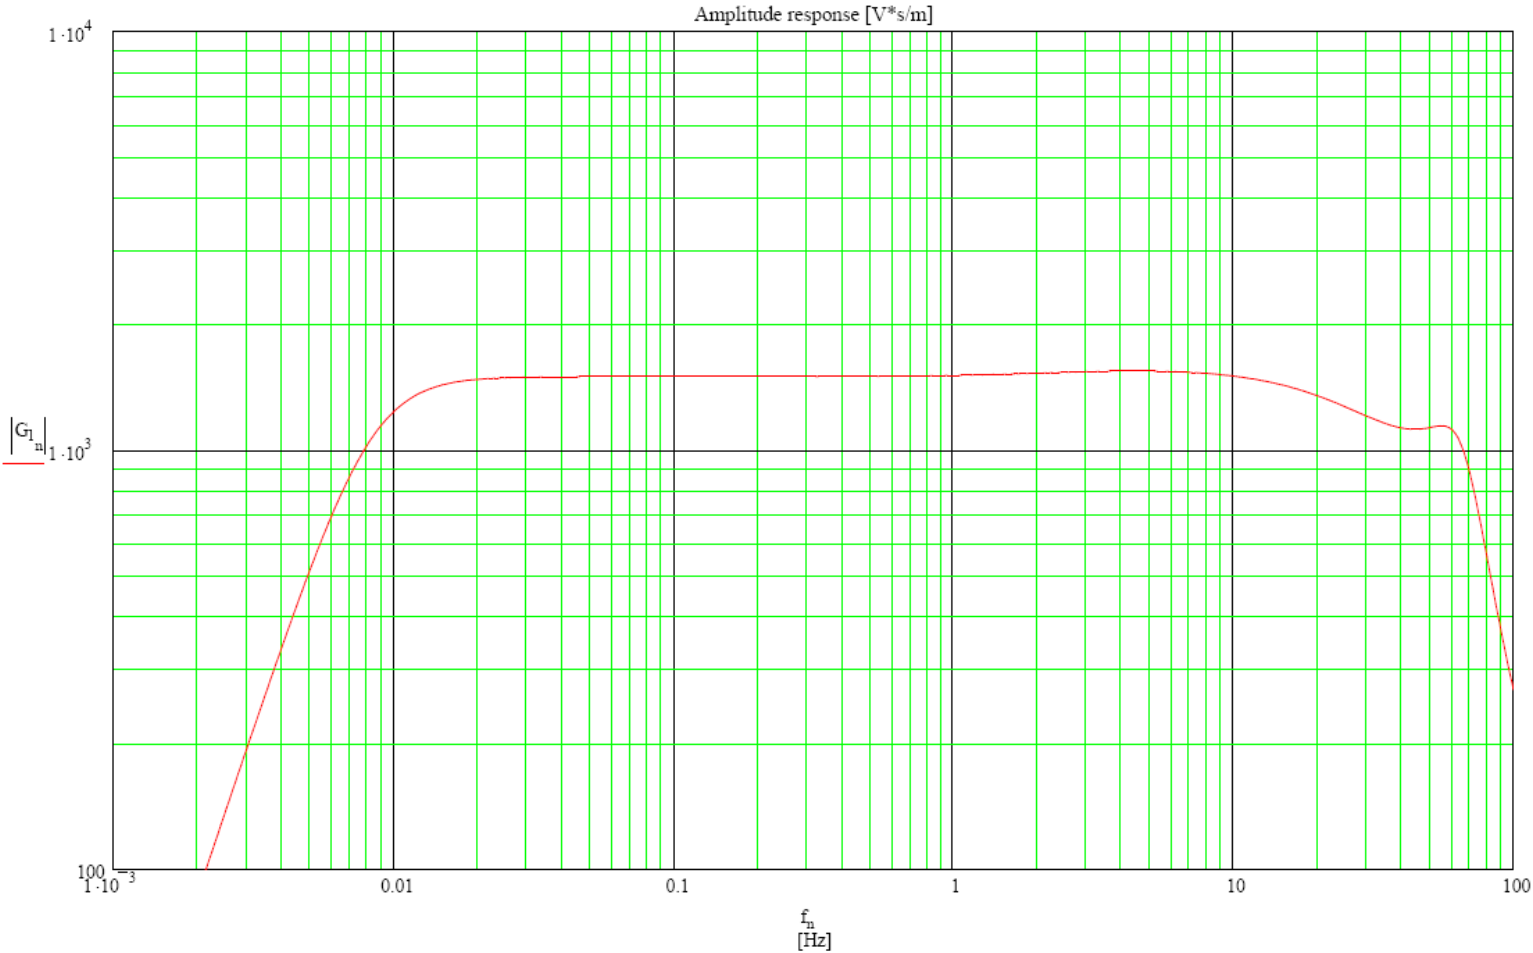

STS-2 N/S 29424

PoleZero.mcd, 23.12.2008 12:02

1st generation STS-2: Phase

